



Product		Core Material	Core Dimensions	Case Dimensions	Weight in gram	Packaging
D0030R30N01-01		Nanocrystalline	30x20x10 mm	33x17,3x12,6 mm	24	300 pcs. pr. box
Housing		Permeability	Frequency	$H_{peak}$	$L_{Fe}$	$A_{Fe}$
Cased	Round	30000	10 kHz	3,6 mA/cm	7,9 cm	0,4 cm <sup>2</sup>

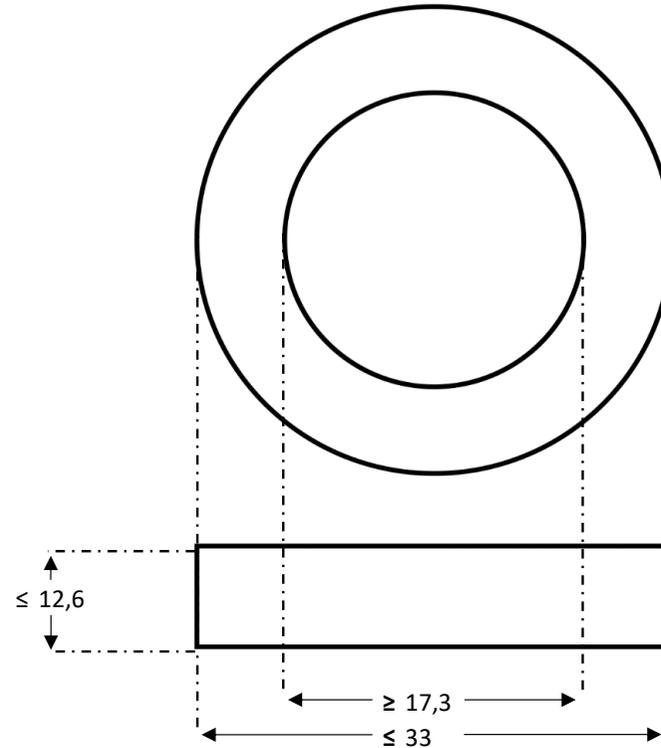

Values in mm

Inspection Values	Measurement limits	Frequency	$I_{eff} \times N$ (mA turns)	Date: 19.04.2023
AL (μH)	13,4 - 26,8	10 kHz	20	Index: 1 Revision: 1
AL (μH)	6,7 - NA	100 kHz	20	Comments:
Created	Approved	Released	Quality	Product released
MWE	MMO	HJP/MMO	HJP	All parameters can be changed without prior notice.

