
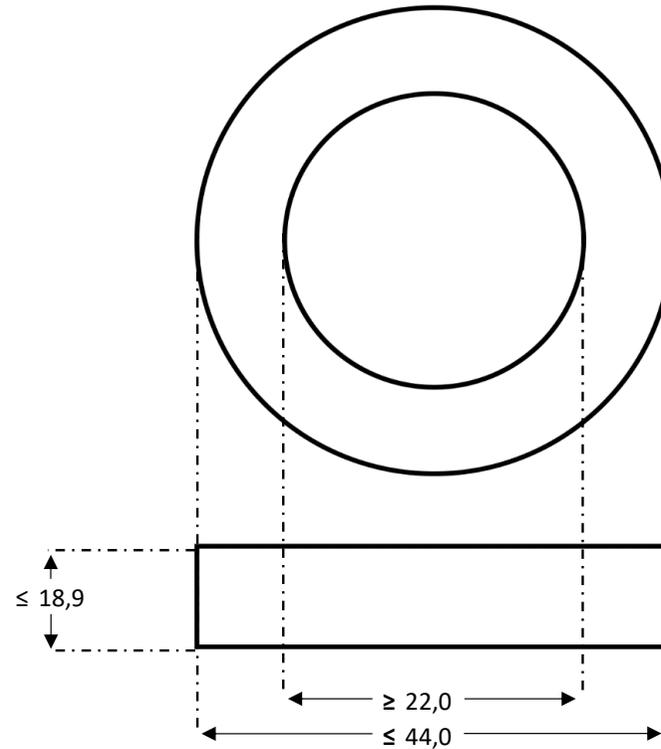


Product		Core Material	Core Dimensions	Case Dimensions	Weight in gram	Packaging
D0040R30N01-02		Nanocrystalline	40x25x15 mm	44x22x18,9 mm	68	80 pcs. per box
Housing		Permeability	Frequency	$H_{peak}$	$L_{Fe}$	$A_{Fe}$
Cased	Round	30000	10 kHz	3 mA/cm	10,2 cm	0,90 cm <sup>2</sup>

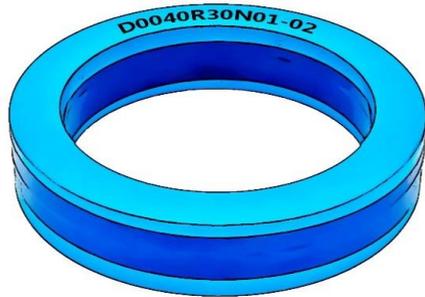

Values in mm

Inspection Values	Measurement limits	Frequency	$I_{eff} \times N$ (mA turns)	Date: 10.06.2025	 <b>Blueferrite.com</b>
AL ( $\mu$ H)	23,3 - 46,6	10 kHz	25	Index: 2      Revision: 3	
AL ( $\mu$ H)	11,6 - NA	100 kHz	25	Comments:	
Created	Approved	Released	Quality	Product released	
MWE	MMO	HJP/MMO	HJP	All parameters can be changed without prior notice. Rev. 3: Outer diameter adjusted	