


Product		Core Material	Core Dimensions	Case Dimensions	Weight in gram	Packaging
D0040R60N01-02		Nanocrystalline	40x25x15 mm	44x22x18,9 mm	68	80 pcs. per box
Housing		Permeability	Frequency	H_{peak}	L_{Fe}	A_{Fe}
Cased	Round	60000	10 kHz	3 mA/cm	10,2 cm	0,90 cm ²

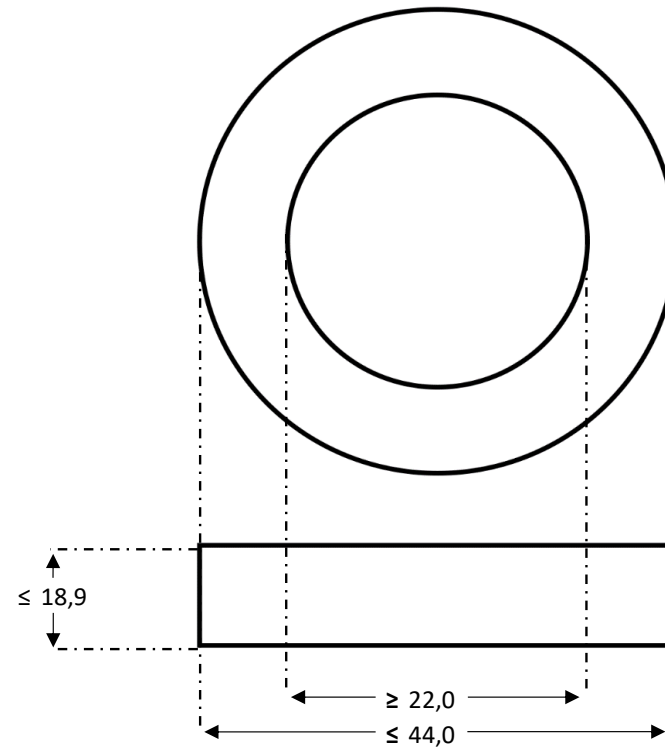

Values in mm

Inspection Values	Measurement limits	Frequency	$I_{\text{eff}} \times N$ (mA turns)	Date: 10.06.2025	 Blueferrite.com
AL (μH)	46,5 - 93,0	10 kHz	25	Index: 2 Revision: 3	
AL (μH)	11,6 - NA	100 kHz	25	Comments:	
Created	Approved	Released	Quality	Product released	
MWE	MMO	HJP/MMO	HJP	All parameters can be changed without prior notice. Rev. 3: Outer diameter adjusted	
www.Blueferrite.com		info@Blueferrite.com		Carl-Becker Straße 42 - 63571 Gelnhausen - Germany	