


<b>Product</b>		<b>Core Material</b>	<b>Core Dimensions</b>	<b>Case Dimensions</b>	<b>Weight in gram</b>	<b>Packaging</b>
D0200R30N01-01		Nanocrystalline	200x175x30 mm	208x166x37 mm	1300	2 pcs. pr. box
<b>Housing</b>		<b>Permeability</b>	<b>Frequency</b>	$H_{peak}$	$L_{Fe}$	$A_{Fe}$
Cased	Round	30000	10 kHz	3,5 mA/cm	58,9 cm	3,0 cm <sup>2</sup>

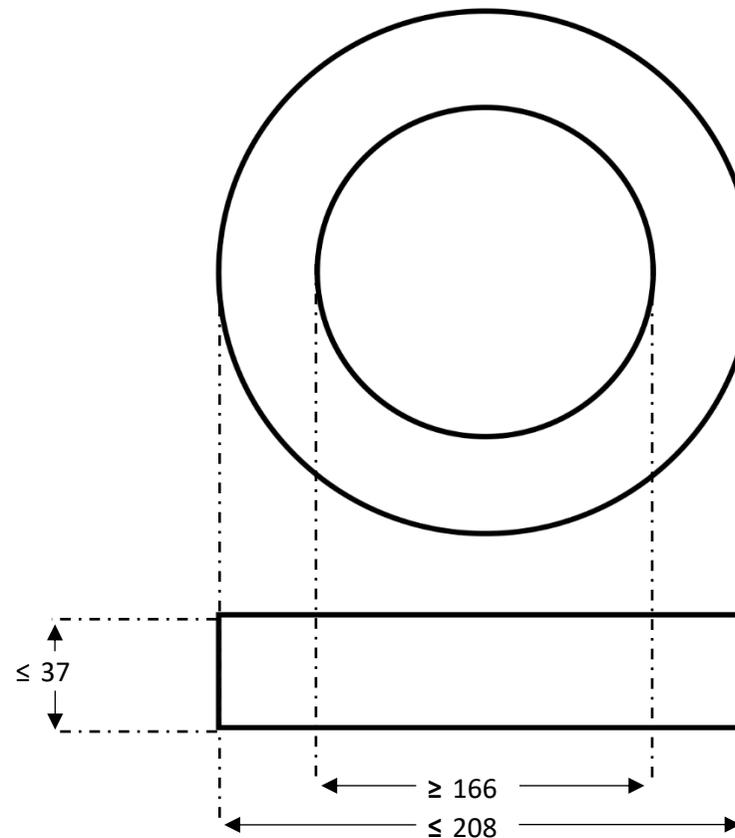

Values in mm

<b>Inspection Values</b>	<b>Measurement limits</b>	<b>Frequency</b>	$I_{eff} \times N$ (mA turns)	<b>Date:</b> 24.03.2023	 <b>Blueferrite.com</b>
AL ( $\mu$ H)	13,4 - 26,8	10 kHz	130	<b>Index:</b> 1 <b>Revision:</b> 1	
AL ( $\mu$ H)	6,7 - NA	100 kHz	130	<b>Comments:</b>	
<b>Created</b>	<b>Approved</b>	<b>Released</b>	<b>Quality</b>	Product released	
MWE	MMO	HJP/MMO	HJP	All parameters can be changed without prior notice.	