


Product		Core Material	Core Dimensions	Case Dimensions	Weight in gram	Packaging
D0200R60N01-01		Nanocrystalline	200x175x30 mm	208x166x37 mm	1300	2 pcs. pr. box
Housing		Permeability	Frequency	H_{peak}	L_{Fe}	A_{Fe}
Cased	Round	60000	10 kHz	3,5 mA/cm	58,9 cm	3,0 cm ²

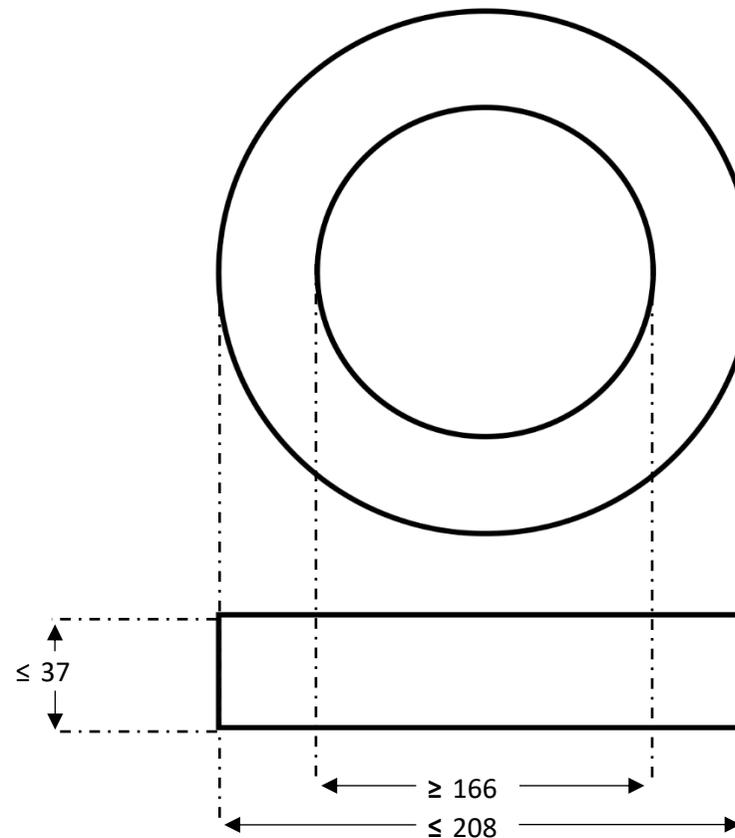

Values in mm

Inspection Values	Measurement limits	Frequency	$I_{eff} \times N$ (mA turns)	Date: 24.03.2023	 Blueferrite.com
AL (μ H)	26,9 - 53,8	10 kHz	130	Index: 1 Revision: 1	
AL (μ H)	6,7 - NA	100 kHz	130	Comments:	
Created	Approved	Released	Quality	Sample	
MWE	MMO	HJP/MMO	HJP	All parameters can be changed without prior notice.	