
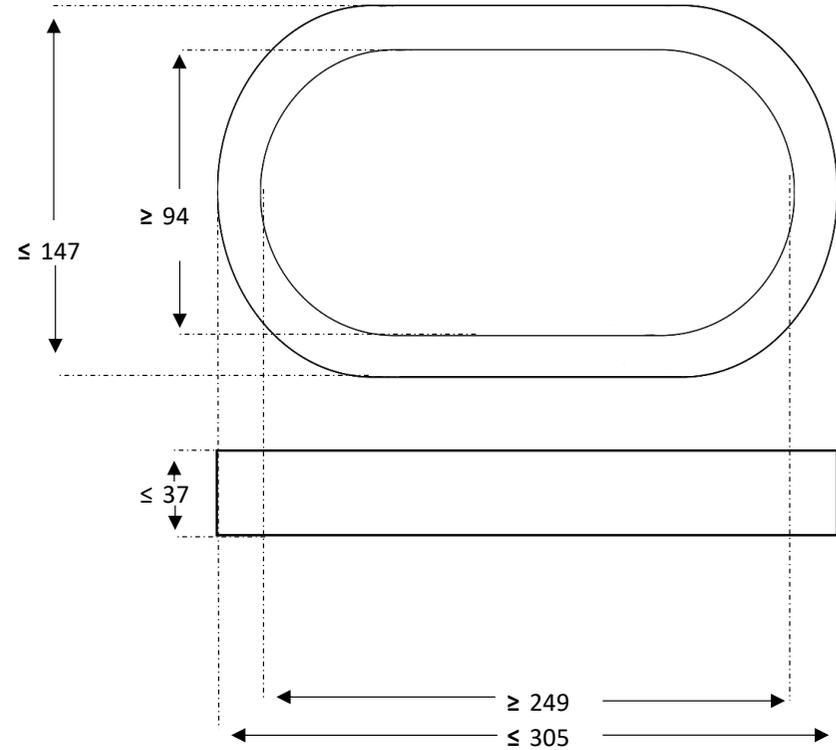


Product		Core Material	Core Dimensions	Case Dimensions	Weight in gram	Packaging
D0236O60N01-01		Nanocrystalline	236x200x30 mm	305x147x37 mm	2200	7 pcs. per box
Housing		Permeability	Frequency	H_{peak}	L_{Fe}	A_{Fe}
Cased	Oval	60000	10 kHz	3,0 mA/cm	68,5 cm	4,32 cm ²

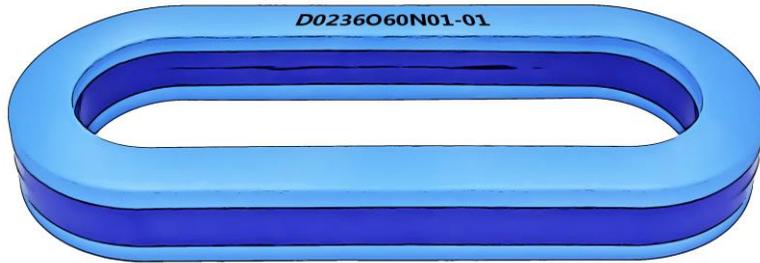

Values in mm

Inspection Values	Measurement limits	Frequency	$I_{eff} \times N$ (mA turns)	Date: 14.02.2025	 Blueferrite.com
AL (μH)	33,3 - 66,6	10 kHz	150	Index: 1 Revision: 2	
AL (μH)	8,3 - NA	100 kHz	150	Comments:	
Created	Approved	Released	Quality	Product released	
MWE	MMO/HJP	HJP/MMO	HJP	All parameters can be changed without prior notice. Rev. 2: Updated packaging size	
www.Blueferrite.com		info@Blueferrite.com		Carl-Becker Straße 42 - 63571 Gelnhausen - Germany	